



CRYSTAL TIPS



29 Kg/24h

Distributori di ghiaccio / Ice Dispenser:
DX35 - TD130

DX 35

DX 35
230V/1N/50Hz

CARATTERISTICHE

- Produzione di singoli cubetti Gourmet pieni, puri e cristallini.
- Sistema di distribuzione ghiaccio con bottone a pressione: i cubetti cadono direttamente nel bicchiere del cliente senza manipolazioni.
- Finiture esterne in acciaio. • Controlli elettro-meccanici semplici ed affidabili.
- Filtro condensatore accessibile frontalmente, facilmente rimovibile e lavabile.

OPZIONALE

- Voltaggi speciali su richiesta

FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Push-button dispensing system: cubes drop directly into the consumer's glass, with no manipulation.
- Resistant stainless steel exterior. • Simple and reliable electromechanic controls.
- Front access condenser air filter, removable and washable. • Water system protected by patented anti-scale system.

OPTIONAL

- Special voltages, on request

DATI TECNICI / SPECIFICATIONS

									
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	kg	kg
DX35 A	220-240/50/1		790	400	10	46.6	2.7	51	60
DX35 W	220-240/50/1		1200	420	10	46.6	125	51	60



CAPACITÀ DEPOSITO / BIN CAPACITY

11,0 kg **550** pcs

DIMENSIONI / DIMENSIONS



L x P x H (mm)

380 x 515 x 1696



470 x 660 x 1710

VOLTAGE




230/50/1

GAS



R134a
GWP=2141

TIPO GHIACCIO / ICE TYPE



PCS / CYCLE
PZ/CICLO

24

WEIGHT ICE
PESO GHIACCIO

20 g

PRODUZIONE GHIACCIO / ICE PRODUCTION

kg/24h
lbs/24h

Raffreddamento ad Aria Air
Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.				
°C °F	32° 90°	21° 70°	15° 60°	10° 50°	10° 50°
10° 50°	21	25	27	29	29
21° 70°	19	23	25	27	27
32° 90°	15	15	15	15	15
38° 100°	12	12	12	12	12
	26	26	26	26	26

Raffreddamento ad Acqua
WaterCooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.				
°C °F	32° 90°	21° 70°	15° 60°	10° 50°	10° 50°
10° 50°	24	27	29	30	30
21° 70°	22	25	26	28	28
32° 90°	20	21	22	22	22
38° 100°	19	20	20	21	21
	42	44	44	46	46



CRYSTAL TIPS




29 Kg/24h

Distributori di ghiaccio / Ice Dispenser:
DX35 - TD130

DX 35

DX 35
230V/1N/50Hz

DIMENSIONI / DIMENSIONS

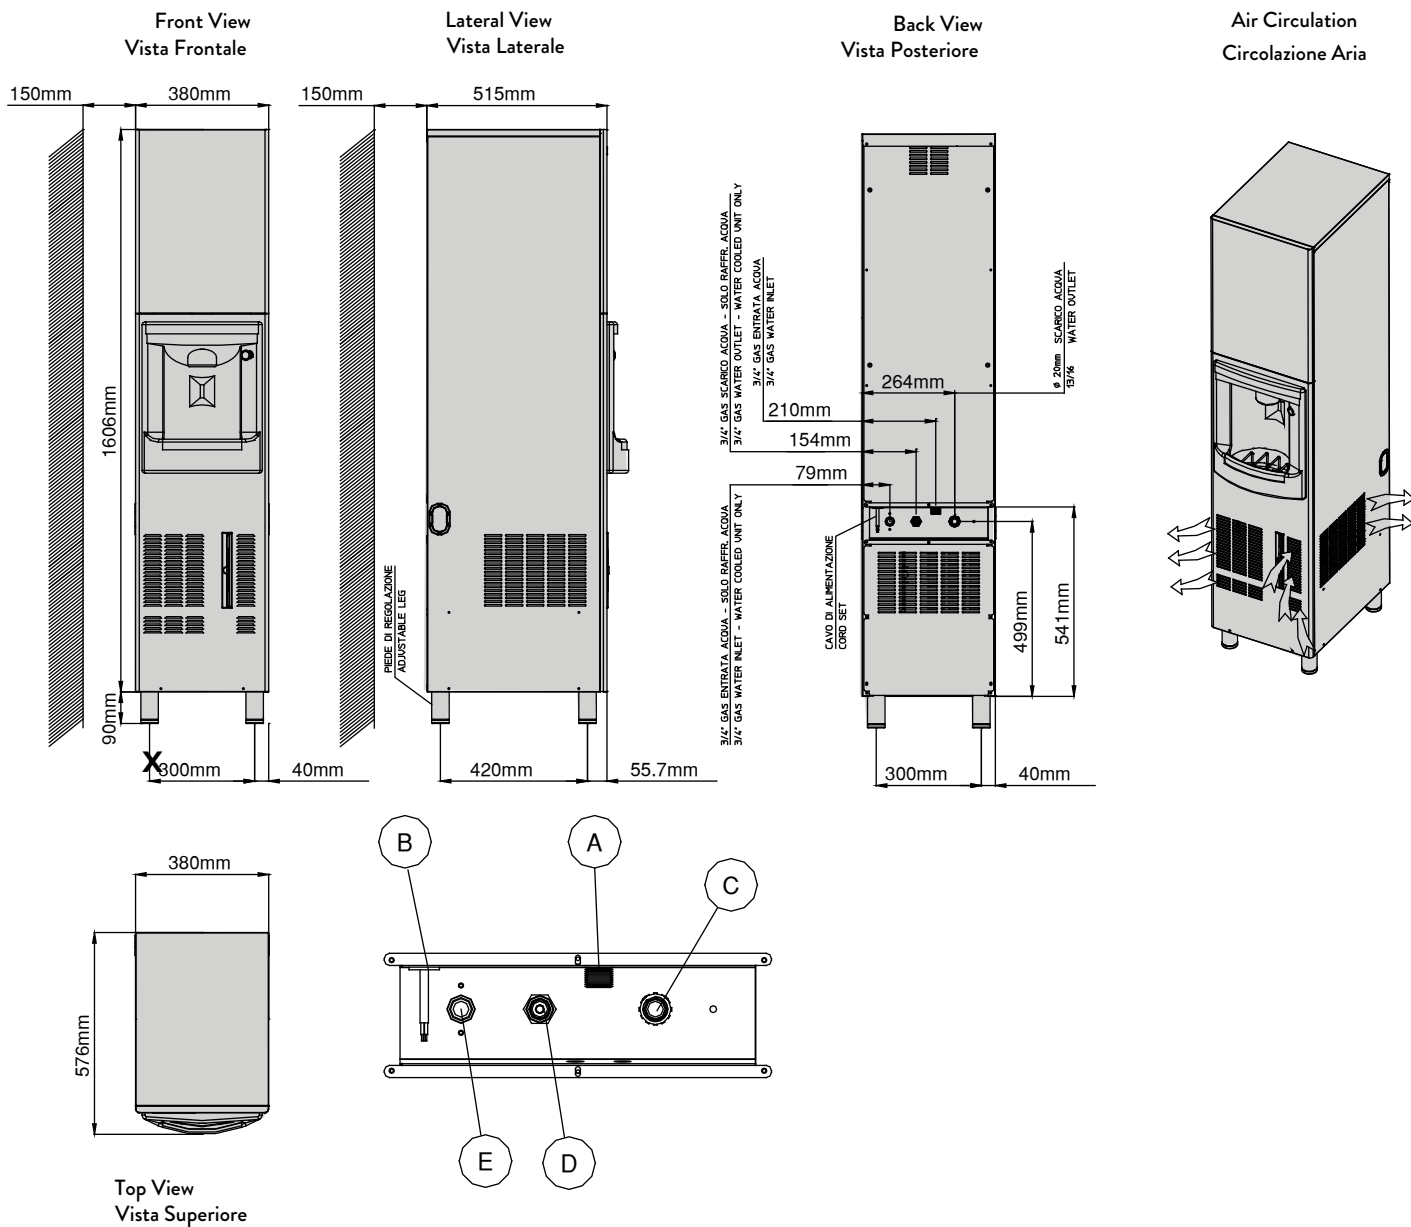

- A** Water inlet connection water condensation Entrata acqua condensatore ad acqua - 3/4" gas OPTIONAL
- B** Electrical cable supply / Ingresso alimentazione elettrica
- C** Water outlet connection / Attacco scarico acqua Ø 20 mm
- D** Water outlet connection water condensation / Uscita acqua condensatore ad acqua - 3/4" gas
- E** Water inlet connection / Attacco entrata acqua - 3/4" gas

Condizioni operative - Operating requirements

	Min.	Max
Temp. Ambiente / Air Temperature	10°C	35°C
Temp. Acqua / Water Temperature	5°C	30°C
Press. Acqua / Water Pressure	1 bar (14psi)	5 bar (70psi)
Conducibilità acqua / Water conductivity	30 µS	500 µS
Alimentazione / Electrical supply	-10%	+10%