

PROJECT:		
ITEM #		OTY:
MODEL #		
AIA #	_ SIS #	
ΛIΛ #	_ 010 #	

# **PIZZA PREP TABLE**

## VPP67HC



## **EXCLUSIVE WARRANTY**

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)







## **CABINET CONSTRUCTION**

- · Stainless Steel Exterior (galvanized back and bottom)
- · Aluminum Interior
- 22 Gauge Stainless Steel Top
- Hinged, Insulated, Removable Flat Lift-Up Lid
- · One-Piece, Snap-In Magnetic Door Gaskets
- · Heavy-Duty Aluminum Pan Liner
- 8' Cord And Plug (see electrical data for details)

#### **FEATURES**

- · Full Electronic Control
- · Chrome Lift Off Hinges
- · Low Profile Horizontal Door Handles
- · Epoxy Coated Shelves (2 per section)
- Stay-Open Door Feature For Easy Product Loading
- Top Accommodates Up To 6" Deep Food Service Pans (pans not included)
- · Removable 19" Wide Cutting Board
- 3" Casters Two With Locks

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- · Side Mounted Refrigeration System For Serviceability
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

### **OPTIONS & ACCESSORIES**

- · Stainless Steel Interior
- · Stainless Steel Back
- Exterior Door Laminate
- Door Lock
- Additional Shelves

- Shelf Clips
- · Single & Double Overshelf Kit
- · Bun Tray Rack (per door)
- Tray Slide Kit
- 6" Casters, 6" Legs Or 6" Seismic Legs
- Compressor On Left (specify at time of order)
- Remote Models\* (6" legs only)

  (refrigerant must be specified at time of order, see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168


Sales@VictoryRefrigeration.com VictoryRefrigeration.com


 Rev. 7/1/24 Printed in U.S.A.
 APPROVAL:
 DATE:



## VPP67HC



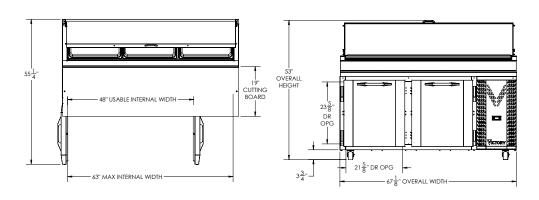



We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

#### 2" Bottom & 2" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	20.68	Cabinet Voltage	115/60/1	Height	49"
Width, Overall (in.)	67 1/8"	Total Amperes	4.5	Width	70"
Depth, Overall (with cutting board)	37"	NEMA Plug (8' cord)	5-15P	Depth	45"
Height Overall (with casters)	53"	REFRIGERATION DATA		Crated Weight	470 lbs
Depth, Door Open 90°	55 1/4"	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Openings (in.)	21 5/8" x 23 5/8"	Refrigerant	R-290		
No. Of Doors/Shelves	2/4	Capacity (BTU/HR) (100°F/20°F)	2940		
		Heat Rejection (BTU/HR)	4410	time of order.	
		Charge (lbs/grams/ounces)	0.231 / 105 / 3.70		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168 

Rev. 7/1/24 Printed in U.S.A.

