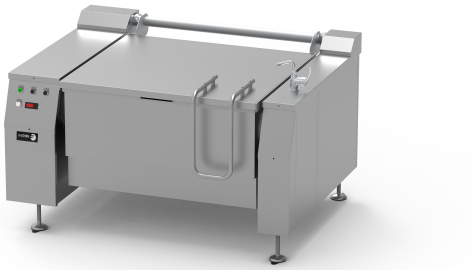

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SBEA-150 50/60Hz 400V 3N

19085085 22/11/2021

DENOMINATION:

Automatic tilting bratt pan directly heated electric 150 L

DESCRIPTION :

"- Base and walls of cooking chamber made from AISI 304 stainless steel:
- Cooking chamber with non-stick finish and ceramic microspheres.
- Water can be added into the chamber via a single tap point.
- 10/10 thick AISI 304 stainless steel lid, with chrome plated rack and preloaded spring and stainless steel handle.
- Supporting structure made from 40/10 thick stainless steel, mounted on adjustable steel feet for levelling.
- 10/10 thick satin-finished AISI 304 stainless steel external walls.
- 15/10 thick satin-finished AISI 304 stainless steel shelf.
- Automatic tilting with hydraulic drive on the front axle
- Automatic shutdown in the event of system failure."
"- Heating via a set of electric elements.
- Safety thermostat for elements that prevents overheating or inadequate heat levels.
- Temperature control (100°C - 250°C).
- Standard supply voltage 400 V 3N 50/60 Hz."

POSSIBLE ACCESSORIES :

- ACCESSORIES LARGE CAP.

DIMENSIONS



X Width	1600	mm	X Gross width	1660	mm
Y Depth	905	mm	Y Gross depth	1180	mm
Z Height	930	mm	Z Gross height	1270	mm
Net Weight	360,0	kg	Gross Weight	435,0	kg
Net volume	1,347	m3	Gross volume	2,488	m3

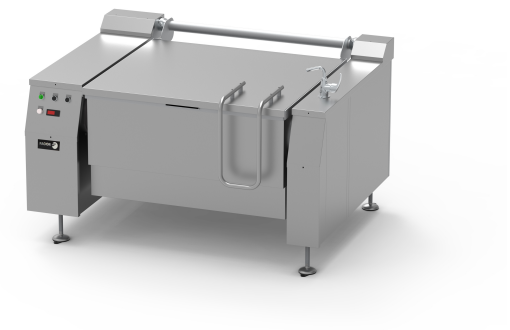

Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
SBEA-150 50/60Hz 400V 3N

19085085 22/11/2021

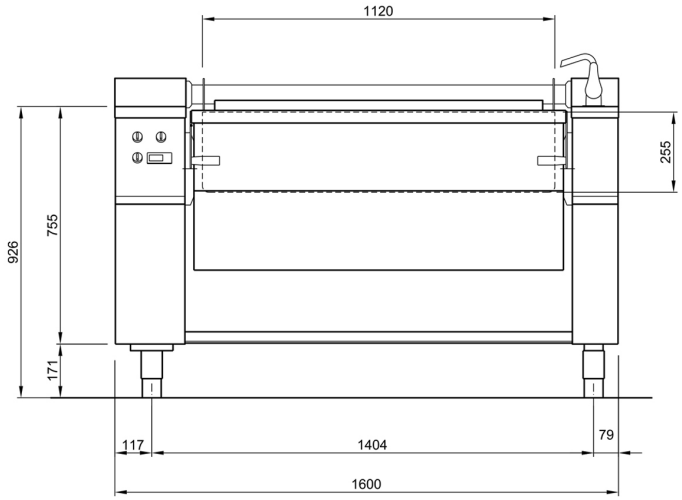

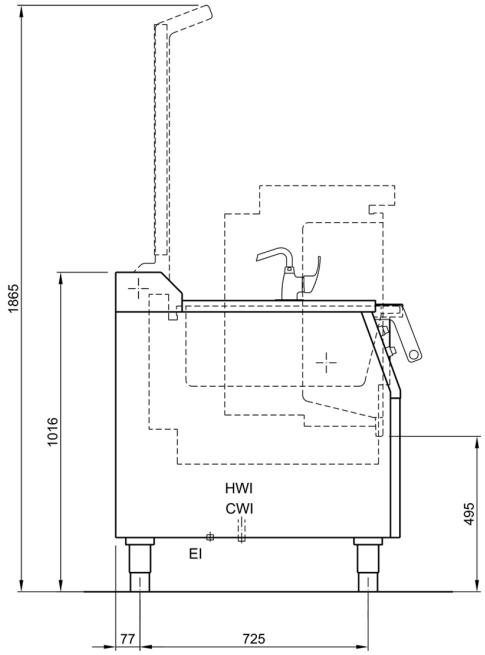

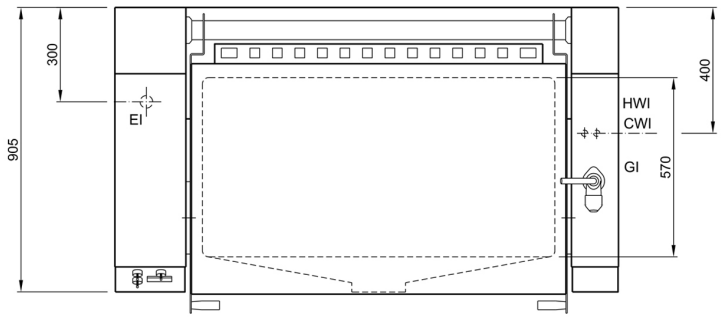

ALLACCIAMENTI - BRANCHEMENTS - CONNECTIONS

HWI -	ACQUA CALDA EAU CHAUDE HOT WATER	100 - 250 kPa (1 - 2,5 bar)	1/2" M
CWI -	ACQUA FREDDA EAU FROIDE COLD WATER	100 - 250 kPa (1 - 2,5 bar)	1/2" M
EI -	ARRIVO CAVI ELETTRICI ENTREE CABLE ELECTRIQUE ELECTRIC CORD ENTRY	(STANDARD) 380-415V 3N 50-60HZ 15,4KW (OPTIONAL) 380-415V 3 50-60HZ 15,4KW (OPTIONAL) 220-240V 3 50-60HZ 15,4KW	