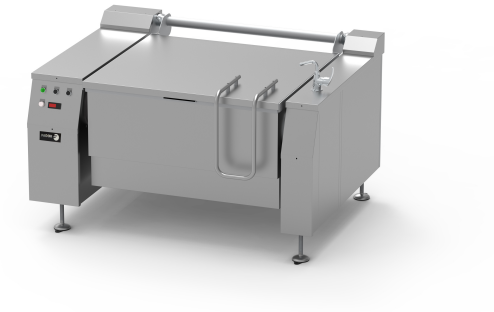

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SBEA-210 50/60Hz 400V 3N

19085087 22/11/2021

DENOMINATION:

Automatic tilting bratt pan directly heated electric 210 L

DESCRIPTION :

"- Base and walls of cooking chamber made from AISI 304 stainless steel:
- Cooking chamber with non-stick finish and ceramic microspheres.
- Water can be added into the chamber via a single tap point.
- 10/10 thick AISI 304 stainless steel lid, with chrome plated rack and preloaded spring and stainless steel handle.
- Supporting structure made from 40/10 thick stainless steel, mounted on adjustable steel feet for levelling.
- 10/10 thick satin-finished AISI 304 stainless steel external walls.
- 15/10 thick satin-finished AISI 304 stainless steel shelf.
- Automatic tilting with hydraulic drive on the front axle
- Automatic shutdown in the event of system failure."
"· SBGA and SBEA models: bottom made from 10 mm thick AISI 316 stainless steel Option: 12 mm thick composite (9 mm iron + 3 mm steel)."

POSSIBLE ACCESSORIES :

- ACCESSORIES LARGE CAP.

DIMENSIONS



X Width	2000	mm	X Gross width	2060	mm
Y Depth	905	mm	Y Gross depth	1180	mm
Z Height	930	mm	Z Gross height	1270	mm
Net Weight	410,0	kg	Gross Weight	490,0	kg
Net volume	1,683	m3	Gross volume	3,087	m3

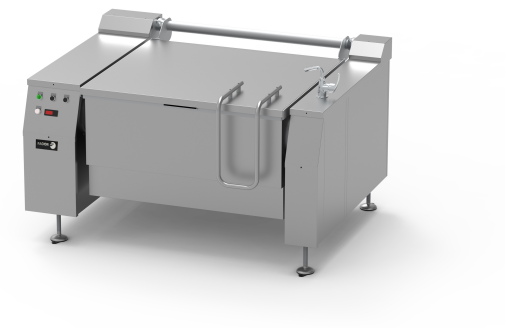

Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
SBEA-210 50/60Hz 400V 3N

19085087 22/11/2021

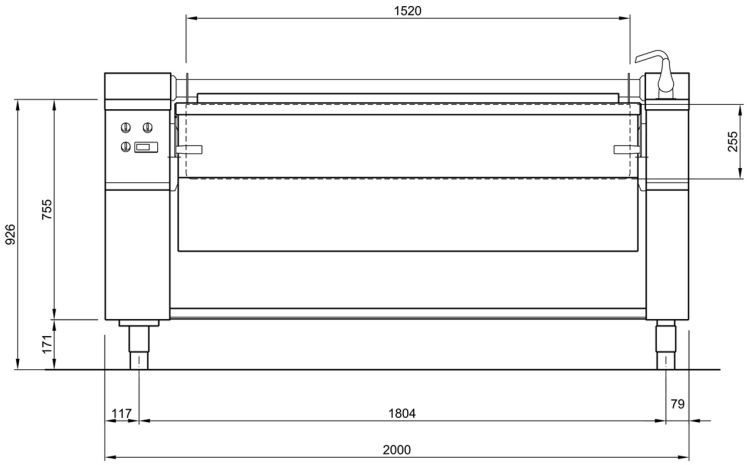

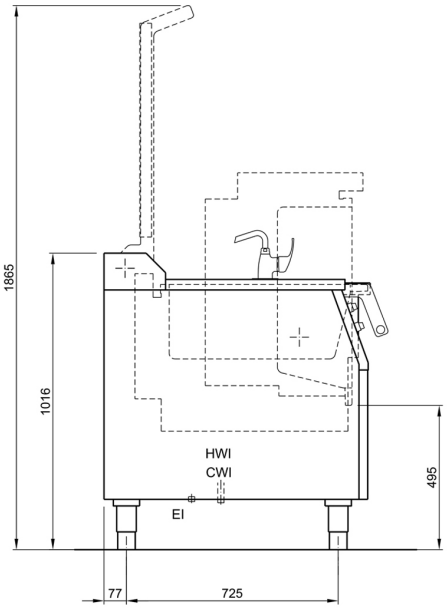

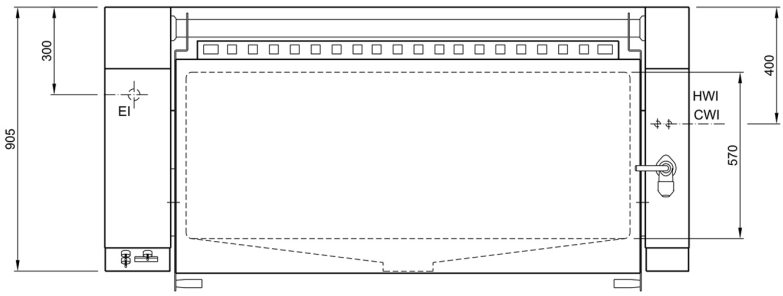

ALLACCIAMENTI - BRANCHEMENTS - CONNECTIONS

HWI -	ACQUA CALDA EAU CHAUDE HOT WATER	100 - 250 kPa (1 - 2,5 bar)				1/2" M
CWI -	ACQUA FREDDA EAU FROIDE COLD WATER	100 - 250 kPa (1 - 2,5 bar)				1/2" M
EI -	ARRIVO CAVI ELETTRICI	(STANDARD)	380-415V	3N	50-60HZ	20,4KW
	ENTREE CABLE ELECTRIQUE	(OPTIONAL)	380-415V	3	50-60HZ	20,4KW
	ELECTRIC CORD ENTRY	(OPTIONAL)	220-240V	3	50-60HZ	20,4KW