S



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## VISTA® BOTTOM MOUNT REACH-IN FREEZER

MODEL: **FB19HC-1S** 

FB19HC Solid Door Reach-in Freezer Hydrocarbon Series



# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- · Stainless steel front and door, gray painted sides
- · Gray painted aluminum interior
- Full electronic control
- LED lighting
- Door locks
- Anti-microbial door handle
- Self closing door with 120° stay open feature
- Spring-loaded style hinges
- One-piece grille allows easy removal/installation for preventative maintenance
- Three (3) heavy duty epoxy coated wire shelves
- 6" Casters with (2) brakes

#### **OPTIONS & ACCESSORIES**

- Additional epoxy shelves (5 max per section)
- · Shelf clips
- 3" Casters or 6" legs
- 6" Flanged/seismic feet
- Remote option\* (see note on back page)

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- · Hot gas condensate evaporation
- Adaptive defrost
- · Epoxy coated evaporator coil
- Freezer capable of maintaining product temperatures down to -10°F
















MODEL	FB19HC-1S
EXTERNAL DIMENSIONAL DATA	
Width Overall	27 1/4"
Depth Overall with Handle	27 3/4"
Height Overall with Casters	84"
Number of Doors	1
Depth with Door Open 90°	51 ¾"
Door Opening (in)	24 ⅓" x 52 ¾"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	17.87
Internal Width Overall (in)	24 1/8"
Internal Depth Overall (in)	19 1/8"
Internal Height Overall (in)	61 <b>%</b> ″
Internal Height Useable (in)	53"
Number of Shelves	3
ELECTRICAL DATA	
Full Load Amperes 115/60/1	7.5
REFRIGERATION DATA	
Horsepower*	3/4
Capacity (BTU/Hr)*	1927
SHIPPING DATA	
Gross Weight - Crated	380 lbs
Height - Crated	85"
Width - Crated	36"
Depth - Crated	34"

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

**Bottom Mount Reach-In Freezer** 

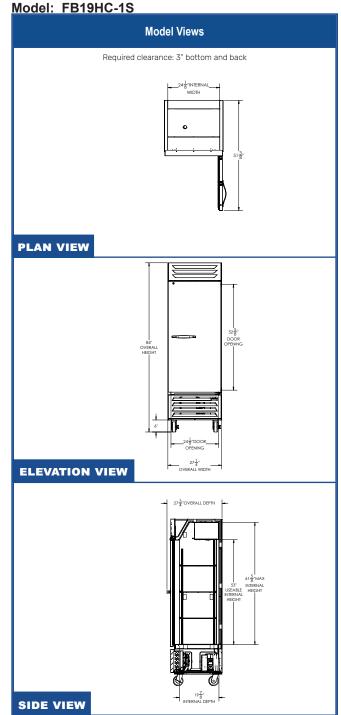

### \*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

