Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
B-E9101 400V 3N

19075470 11/11/2021

DENOMINATION:

Electric grill, cast iron grill, 1 module, 900 range.

DESCRIPTION :

- Surface tops manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishes. Screws hidden from view.
- Grills fitted with 130 mm high dismountable guard to avoid splashing, manufactured in stainless steel.
- High temperature enamelled cast iron flue protector.
- Access to the components from the front.
- Machines with IPX5 grade water protection.
- Cast iron grills, dismountable without the need for tools, in 170 mm wide sections.
- The iron grills are reversible, with different finishes on each side:
· Tilted and grooved with ridges for meat.
· Horizontal and flat for fish and vegetables.
- The grills reach a very high temperature (400 °C), meaning that the surface of the product seals rapidly, keeping the inside of the food much juicier.
- Groups of three stainless steel elements under the roasting rack, with radiant deflector (a group of three elements for half-sized module models, two groups for whole module models).
- Independent control for each group of elements via an energy regulator.

POSSIBLE OPTIONS :

- 230 1N- Transformation A 230 V single phase
- 230 III - A 230 V three-phase transformation without neutral
- MARINE - Other machines - Ship transformation - 440 III

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR CHARCOALS KORE
- KORE WHEELS
- TALL CHIMNEY KORE

SUPPLIED ACCESSORIES:

- 19045084 Scraper for charcoal with FE grill Kore generation 1

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	850 mm	Z Gross height	1255 mm
Net Weight	67,0 kg	Gross Weight	80,0 kg
Net volume	0,630 m3	Gross volume	1,077 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	15,000 kW
Amperage (A)	25A
Heating power	15,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X10MM2+T
Single-phase 230V wiring	2X16MM2+T
Three-phase +N 400V wiring	4X4MM2+T

Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
B-E9101 400V 3N

19075470 11/11/2021

B-E9051

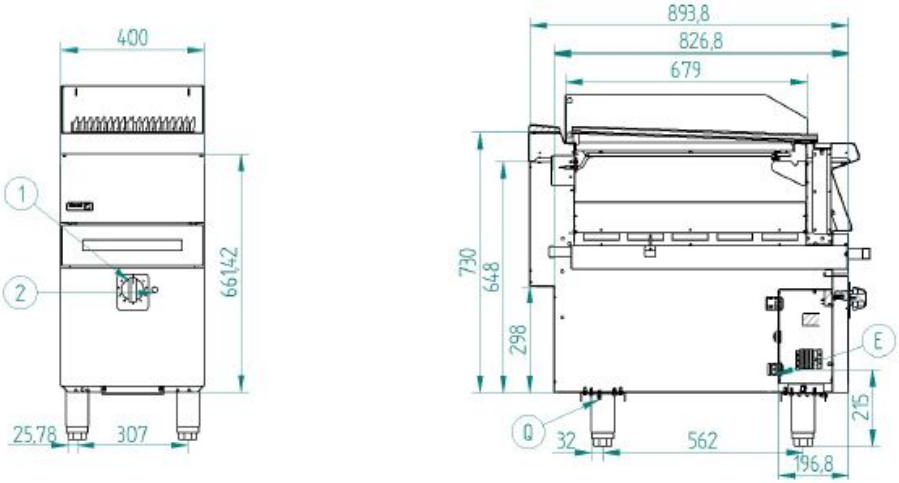

B-E9101

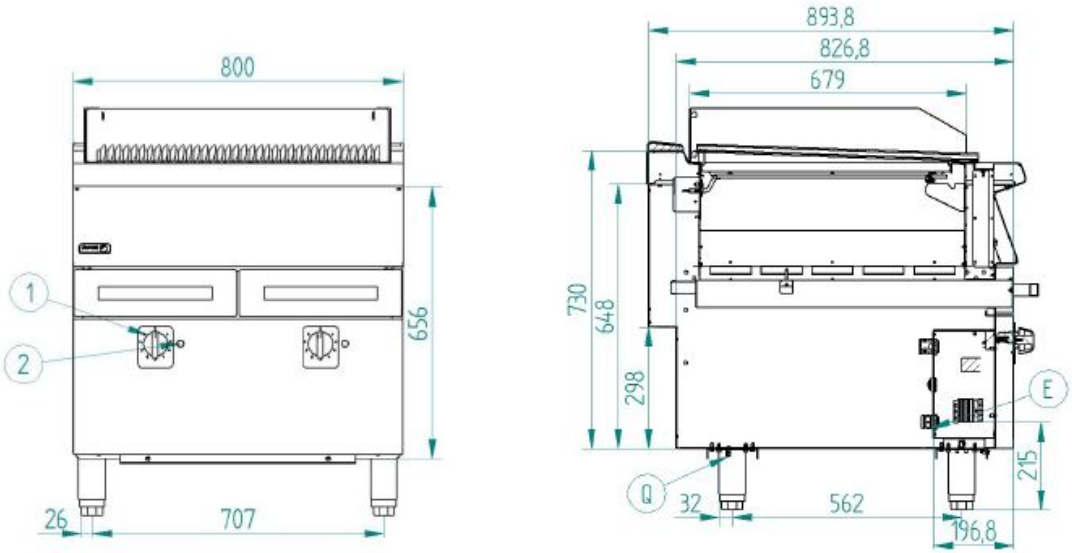

E – Conexión eléctrica — Electrical connection
Q – Conexión equipontencial — Equipotential
1 – Mando eléctrico — Electric control
2 – Piloto ambar — Ambar pilot