ADANDE

Combo cassette drawer

A+ fridge above standard drawer (AVS2)
or standard above A+ fridge drawer (VAS2)
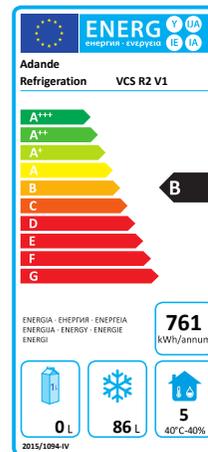

Blast Chill
For added functionality a BC option is available with Standard Drawers
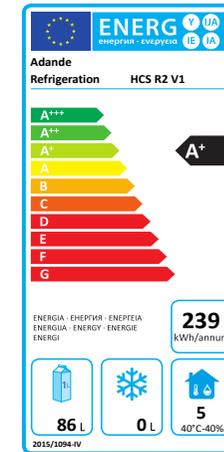
| Applications

- Ergonomic storage solution, right at the point of use
- Ideal for meat, deli & dessert prep
- Perfect for garnish and 'mise en place' generally
- Frozen storage by the deep fry station, with worktop mounted Fry Basket Rack as an optional extra

Hydrocarbon R600a Refrigerant

ENERG Y IJA / IE IA

Adande Refrigeration — VCS R2 V1

A+++
A++
A+
A
B
C
D
E
F
G

B

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ ENERGIA · ENERGY · ENERGIE ENERGI

761 kWh/annum

0 L | 86 L | 5 40°C-40%

2015/1094-IV

ENERG Y IJA / IE IA

Adande Refrigeration — HCS R2 V1

A+++
A++
A+
A
B
C
D
E
F
G

A+

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ ENERGIA · ENERGY · ENERGIE ENERGI

239 kWh/annum

86 L | 0 L | 5 40°C-40%

2015/1094-IV

Standard Drawer
'B' Energy Rating in freezer mode
'A' Energy Rating in fridge mode
(Consumption 307 kWh/annum)

+15°C ←→ -22°C
❄❄❄❄❄

A+ Fridge Drawer
'A+' Energy Rating
(Consumption 239 kWh/annum)

+15°C ←→ 0°C
❄❄❄❄❄

Storage Capacity

Gastronorm (GN) Pans
4 x 1/1 GN
100 mm Deep
or equivalent (per Drawer)

Maximum Weight
40 kg of Food (per Drawer)

Volume
86 Litres (per Drawer)

Climate Testing

Tested to **Climate Class 4** (30ºC & 55% relative humidity) for temperature and energy consumption and to **Climate Class 5** (40ºC & 40% relative humidity) for temperature

Electrical

Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug fitted for each country

Mains Lead (included)
2 Metre Coiled Lead

Options

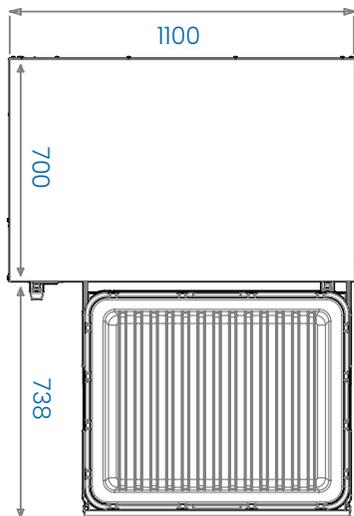Standard above A+ fridge drawer - code: VAS2   or   A+ fridge above standard drawer - code: AVS2

STANDARD DRAWER CASSETTE + SOLID WORKTOP (W)	Flat base (FB)	
Finished height	824 mm	AVS2/FBW & VAS2/FBW
Load-bearing capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

STANDARD DRAWER CASSETTE + COVER TOP (T)	Flat base (FB)	
Finished height	815 mm	AVS2/FBT & VAS2/FBT
Load-bearing capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

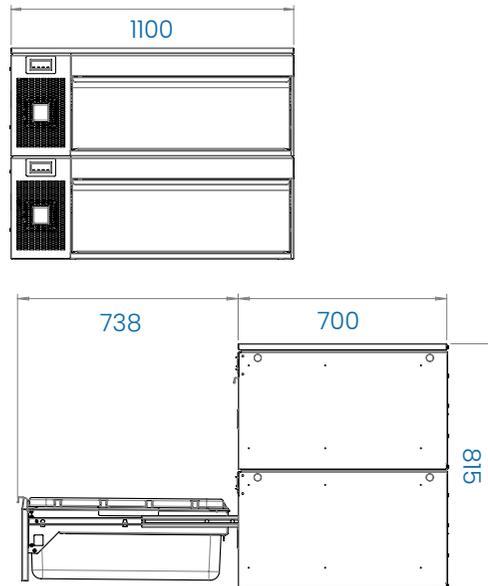For full options please see our Drawer Customising and Accessories pages

Plan View

One drawer cassette (AVS2 & VAS2)
With open drawer

1100

700

738

Elevation

Combo cassette unit (AVS2 & VAS2)
Flat base (FB)
Cover top (T)
AVS2/FBT & VAS2/FBT

1100

738   700

815

Tops

W
10 mm

T
1 mm

Drawer Module

VAS2 & AVS2
794 mm

Base

FB
21 mm