Glastender®

A family company manufacturing in the USA

www.glastender.com

Project: _____	AIA#
Item #: _____ Qty: _____	SIS#
Model #: _____	

Wet Waste Sink Cabinets

SWB	SWB-12-C, SWB-18-DW, SWB-18-DB, SWB-24L-C, SWB-24R-C



SWB-18-DW



SWB-18-DB



SWB-12-C



SWB-24L-C

C ETL LISTED US Intertek 4004503

ETL SANITATION LISTED Intertek 4004503

Conforms to NSF/ANSI STD 2
Certified to ASME112.19.3 / CSA/CAN STD B45.4

Standard Features

- All stainless steel
- One-piece seamless top and backsplash featuring 1/4″ radius corners
- Drawn sink bowl
- Heavy-duty, hot and cold water faucet
- Lift-out perforated plastic wet waste strainer
- Adjustable stainless steel bullet feet
- SWB-12-C includes cabinet base with locking front-hinged access door and storage space for three 1-gallon chemical containers
- SWB-18-DW includes cabinet base with locking front-hinged access door and 6″ round trash chute in work surface for access to trash receptacle (not included)r
- SWB-18-DB includes drainboard work surface with lower recessed wet waste sink
- SWB-24L-C and SWB-24R-C include 12″ drainboard section in the work surface and open, vertically divided storage area for three 1-gallon chemical containers on one side and additional storage on the other

Configurable Options

- Foot-operated faucet; specify option FOF-D
- Sink may be located to the left or right, specify L or R suffix in the model number (for SWB-24)
- Side splashes; specify option LSB-D (left) and/or RSB-D (right)

Accessories

DWC Trash receptacle, stainless steel (for SWB-18-DW)

FOF-D
Foot-operated faucet



Specifications

Drain
- 1-1/2″ I.P.S. threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Faucet
- Deck mount on 4″ centers, accepts 3/8″ sink leads, hot and cold water connections required
- Optional foot-operated faucet: single hole, (2) 1/2″ NPT female inlets and (1) 1/2″ NPT female outlet

Sink Bowl Dimensions
- 9-1/4″ by 11-1/2″ by 6″ deep

Legs
- 1-5/8″ diameter, 16 gauge stainless steel
- Adjustable stainless steel bullet feet for total leg height of 6″ to 7-1/4″

Materials
- 20 gauge stainless steel parts include: all components unless otherwise noted
- 18 gauge stainless steel parts include: leg pads

⚠**WARNING:** The plastic wet waste strainer included with this product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. **Warning applies to State of California only.** Part #03000483

Underbar installation instructions: https://www.glastender.com/support/documents/manuals/underbar-installation-instructions
Cleaning & care instructions: https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


Wet Waste Sink Cabinets

Dimensional Information


SWB-12-C

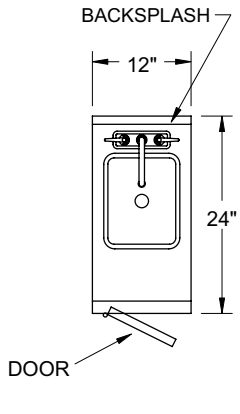


SWB-18-DW

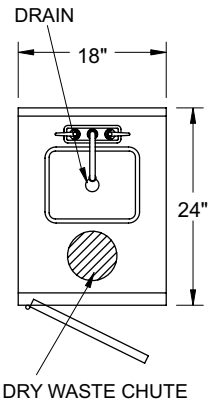


SWB-18-DB

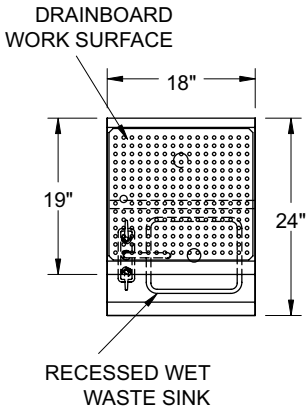


SWB-24L-C



PLAN VIEWS

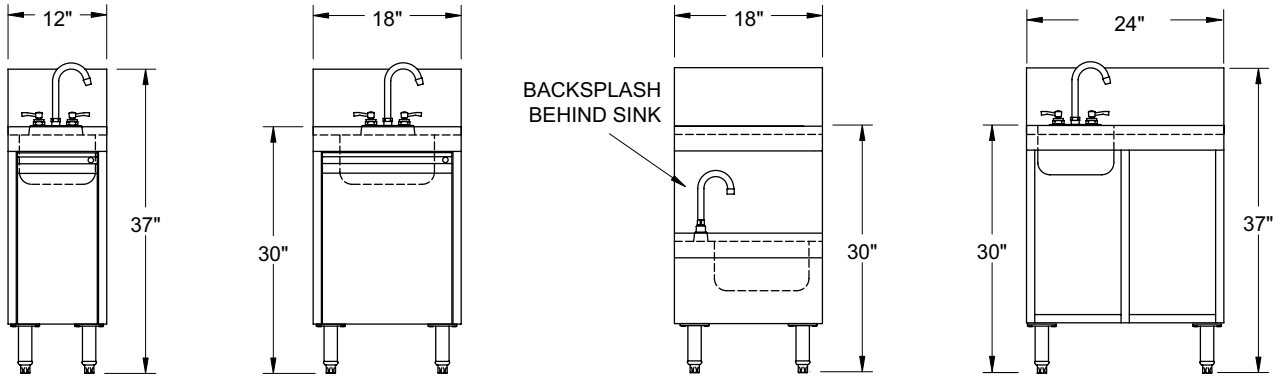

FRONT ELEVATIONS

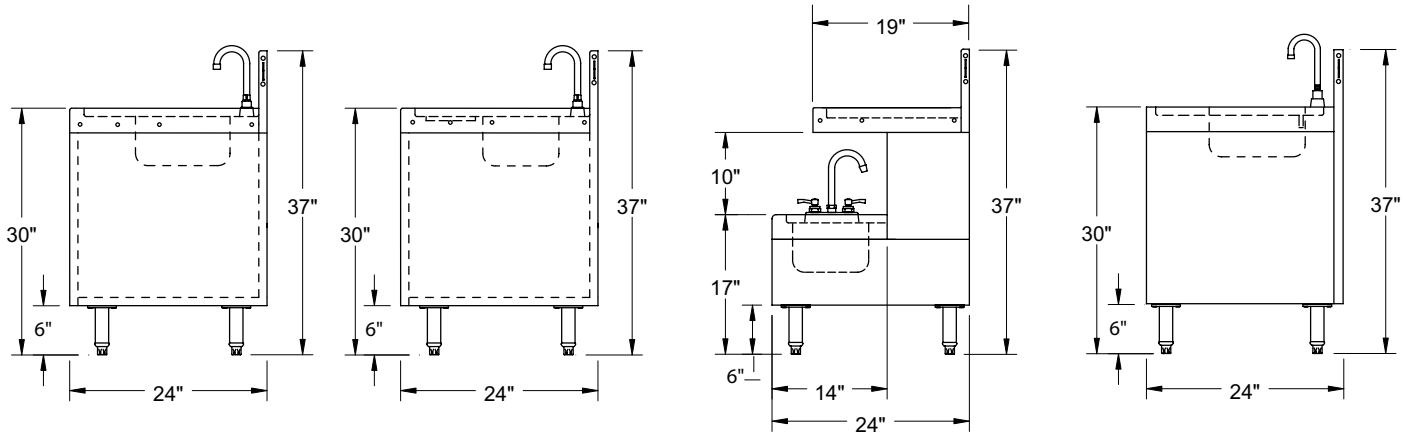

SIDE ELEVATIONS

Glastender
5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA