



Patented

# Fry Top with indirect heating dual control

## DATASHEET

Length (mm): 1200  
 Depth (mm): 900  
 Height (mm): 250/460  
 Net weight (kg): 175,5  
 Packed unit weight (kg): 215,5  
 Pallets size (mm): 1300x1000x670

Electrical power (kW): 10,8 kW  
 Electrical connection:  
 400V 3N 50-60 Hz  
 Phase: 14,54 A

### Cooking surface:

- mod GE1290L2C: flat
  - mod GE1290D2C: half ribbed
  - mod GE1290T2C: ribbed
- made of stainless steel thickness 10 mm with lateral edges and scotch brite back finish.

Available cooking surface L= 1194 mm D= 595 mm

Front dripping tray easily removable and washable  
 Auto supporting structure completely made in stainless steel AISI 304, visible parts with scotch brite finish.

Adjustable plastic feet.


Heating made by resistances immersed in diathermic fluid inside a tank with expansion tank and safety valve.

Switch on/off button, cooking temperature control from 20°C to 260°C degrees by electronic thermostat.

Limit control with manual reset.

Accessories included: power cable, palette knife and kitchen scraper for cleaning.

Protection degree IPX4.  
 CE Certification.

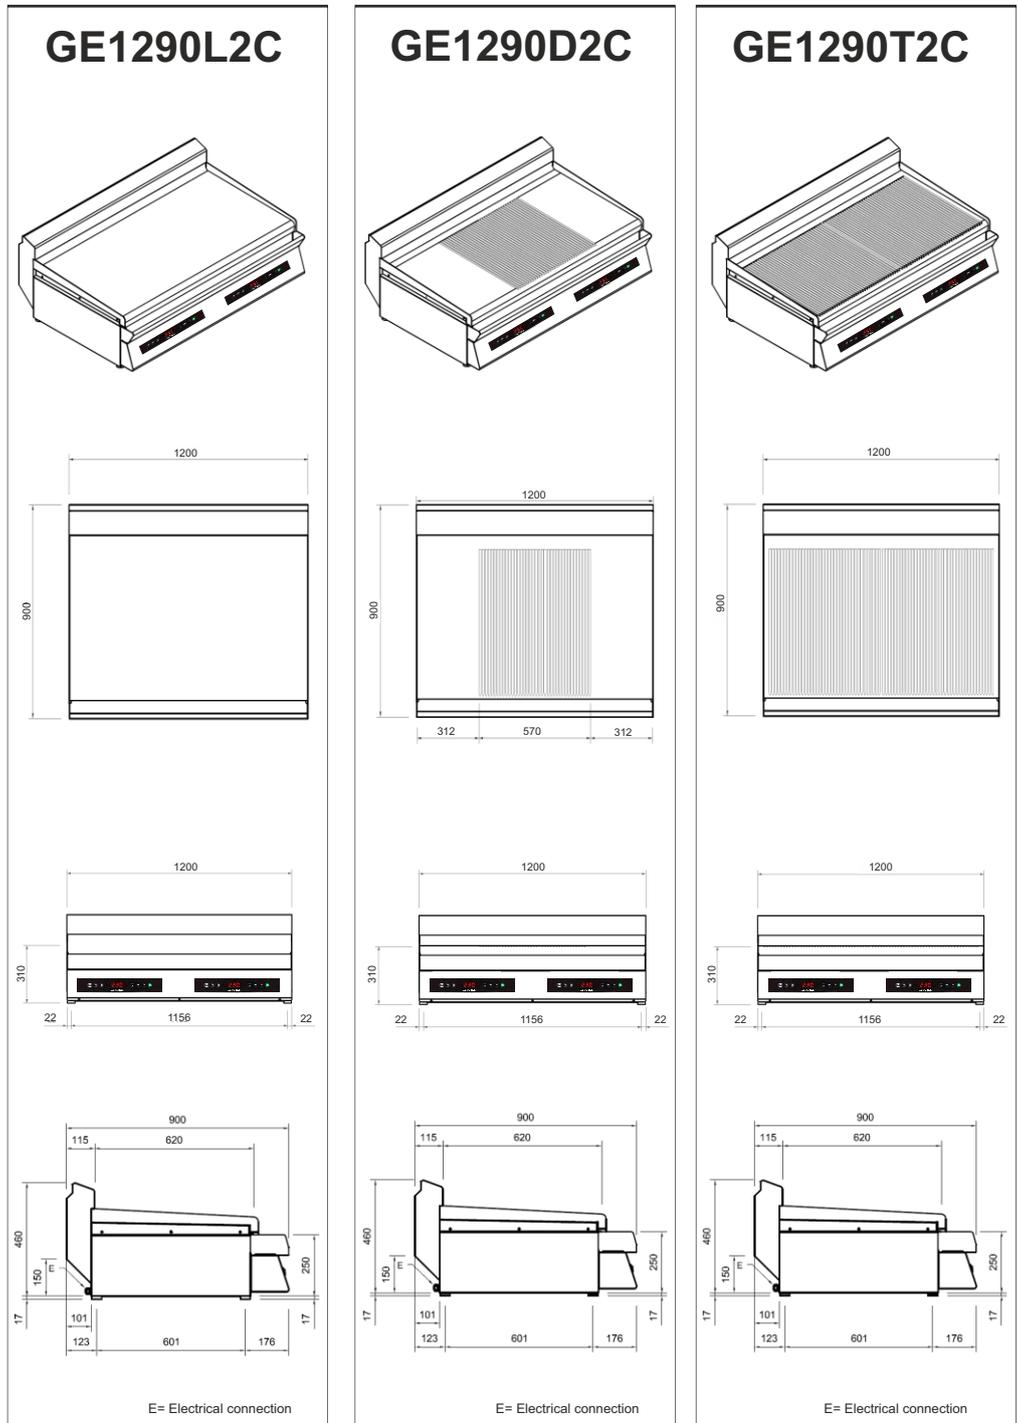

**ZERNIKE**  
 ALTERNATIVE HO.RE.CA. SOLUTIONS

**GRUPPO ZERNIKE s.r.l.**  
 via del Progresso, 15  
 47039 San Mauro Pascoli (FC) Italy  
 Tel. +39 0541.810270-Fax +39 0541.937456  
 info@zernike.it - www.zernike.it



### UK and Ireland Distributor

MCS Technical Products  
 Building 2 Westmead Industrial Estate  
 Westmead Drive, Swindon, SN5 7YT  
 Tel. +44 01793 538308  
 Fax +44 01793 522324  
 sales@mcstechproducts.co.uk www.mcstechproducts.co.uk