



VACUUM PACKING MACHINE SU-810GP+ 208-240/60/3

Floorstanding unit. 4238 cf/h. 21 + 33".



P/N. 1140973



SALES DESCRIPTION

Two sealing bars (21 + 33").
4238 cf/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ Filling plate.
- ✓ Bluetooth connectivity and connection for printer.

OPTIONAL

- Inert gas.
- Sealing plus.
- Printer.
- Vacuum packing bags.
- External vacuum kit for Vac-Norm, containers and accessories.
- Bag cutting kit.
- Support for liquid packaging.
- Additional filling plates.

ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kit
- Vac-norm containers
- Smooth bags for vacuum packing
- Thermal labels for CG2 / RB printer
- RB desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer
- Vacuum packing machines maintenance kits

SPECIFICATIONS

Pump capacity: 3532 cf/h
 Bar length: 20.9"
 Total loading: 3 Hp
 Vacuum pressure (maximum): 0.5 mbar
 Electrical supply: 208 V - 240 V / 60 Hz / 3~ (13.2 A)
 Plug: USA (NEMA L15-30P / 3P+G)

Internal dimensions

- ✓ Width: 34"
- ✓ Depth: 23.7"
- ✓ Height: 8.4"

External dimensions (W x D x H)

- ✓ Width: 37.7"
 - ✓ Depth: 29.8"
 - ✓ Height: 39.2"
- Net weight: 557.7 lb
 Noise level (1m.): 75 dB(A)
 Background noise: 32 dB(A)

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

product sheet
updated 03/12/2025



SAMMIC, S.L. · Basarte, 1
20720 AZKOITIA (Gipuzkoa) · SPAIN

Intertek



VACUUM PACKING MACHINE SU-810GP+ 208-240/60/3


Floorstanding unit. 4238 cf/h. 21 + 33".



P/N. 1140973

Crated dimensions
41.7 x 33.1 x 47.2 "

Gross weight: 643.7 lbs.

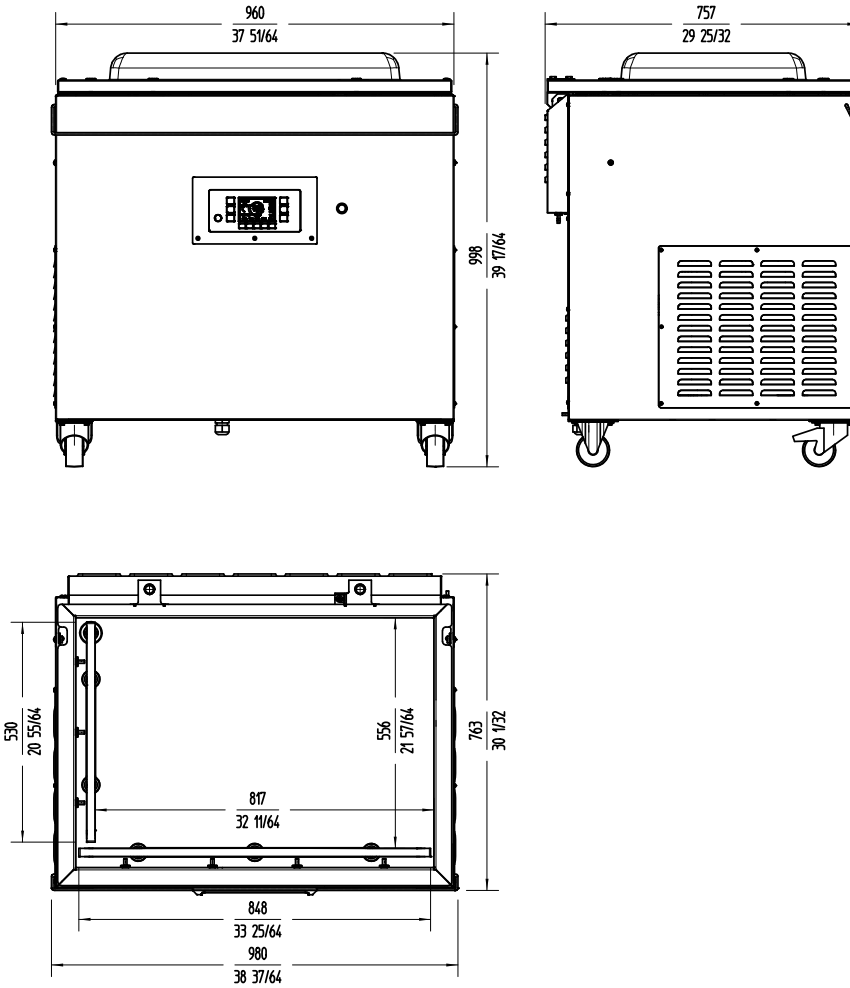

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

sammic | sammic.us
Food Service Equipment Manufacturer

usa@sammic.com phone +1 (224) 307-2232
 1225 Hartrey Avenue toll free +1 844 275 3848
 60202-1056 Evanston, IL



Project	Date
Item	Qty
Approved	

product sheet
updated 03/12/2025