

Deli Displays



Front view



Back view

Displays

Heavy duty square edge closed fronted display chiller with rear sliding doors.



Features

- High grade stainless steel exterior
- High grade mirror finish stainless steel internally
- Hydrocarbon refrigerant
- Energy saving white LED lighting under each shelf as standard
- Panoramic viewing – front, sides and top
- Digital controls/display for accurate temperature control
- Temperature range +2°C to +8°C
- 2 tempered glass shelves supplied
- Mounted on castors and levelling feet

Product Code

WDF097F	Heavy Duty Squared Glass Two Shelved Deli Counter 900 wide
WDF127F	Heavy Duty Squared Glass Two Shelved Deli Counter 1200 wide
WDF157F	Heavy Duty Squared Glass Two Shelved Deli Counter 1500 wide

Deli Displays

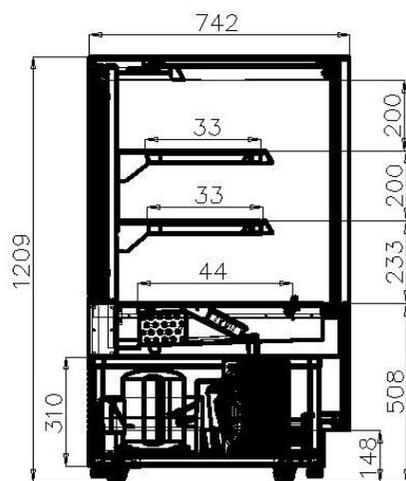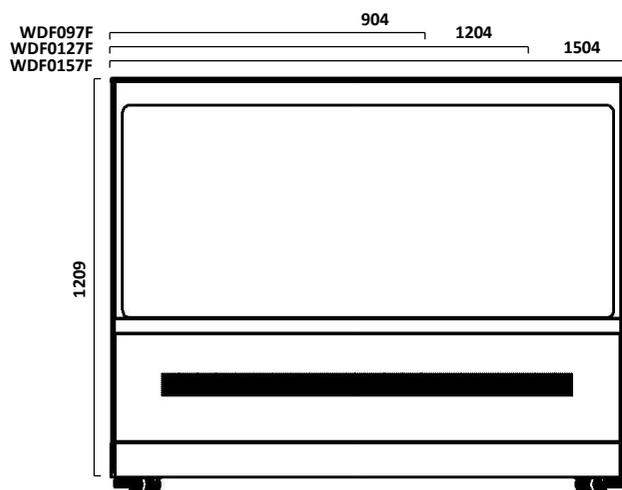

Model	WDF097F	WDF127F	WDF157F
Exterior Dimension (WxDxH) mm	904 x 742 x 1209	1204 x 742 x 1209	1504 x 742 x 1209
Interior Dimension (WxDxH) mm	800 x 600 x 640	1100 x 600 x 640	1400 x 600 x 640
Packing Dimension (WxDxH) mm	960 x 800 x 132	1260 x 800 x 1321	1560 x 800 x 1321
Shelf Dimensions mm	795 x 345	1095 x 345	1395 x 345
Shelf Quantity	2 Shelves plus base	2 Shelves plus base	2 Shelves plus base
Shelf Loading Capacity (Kg Pc)	15	15	15
Capacity (Litre)	290	395	497
Net Weight (Kgs)	200	243	260
Gross Weight (Kgs)	232	273	310
Voltage	220/50/1	220/50/1	220/50/1
Power (Watts)	550	700	800
Electrical Current (Amps)	2.7	3.5	4.1
Power Consumption (KW 24Hrs)	9	15	16.5
Climate Class	3	3	3
Defrost Method	Air Defrost	Air Defrost	Air Defrost
Refrigerant Type / Amount	R290HC – 110g	R290HC – 125g	R290HC – 150g
Cooling Method	Ventilated	Ventilated	Ventilated
Inner Temperature (°C)	+2°C to +8°C	+2°C to +8°C	+2°C to +8°C
Insulation	Polyurethane foam	Polyurethane foam	Polyurethane foam
Foaming Material	C5H10	C5H10	C5H10
Castors	4	4	4
Material External / Internal	S/S - Glass	S/S - Glass	S/S - Glass
Lighting	LED Strips	LED Strips	LED Strips
Door lock	No	No	No