



# UTENSIL WASHER LU-60 230-400/50/3N

600 x 630 mm. basket



1300570



WARE WASHING  
POT WASHERS

## SALES DESCRIPTION

Max. loading height: 650mm.

## FEATURES AND BENEFITS

**Ideal to wash big sized pots and wares.**

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Electronic control panel with LED showing wash and rinse temperature.

## INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.

## ACCESSORIES

- Stainless steel baskets
- Manual water softeners
- Automatic water softeners
- Dosing equipments
- Carrier for trays



**www.sammic.co.uk**  
 Food Service Equipment Manufacturer  
 Unit 2, Trevanah Road  
 Troon Industrial Park  
 LE4 9LS - Leicester  
 uksales@sammic.com  
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet  
updated 27/03/2020



# UTENSIL WASHER LU-60 230-400/50/3N

600 x 630 mm. basket



1300570

## SPECIFICATIONS

Basket dimensions: 600 mm x 630 mm  
 Stainless steel basket : 1  
 Equipment: supplementary trays: 1  
 Maximum glass height: 650 mm  
 Cycles: 3  
 Cycle duration: 120 " / 240 " / 360 "  
 Production baskets/hour: 30 / 15 / 10  
 Pressure pump power: 470 W  
 Electrical supply: 230 V - 400 V / 50 Hz / 3N  
 ~ (30.4 A-17 A)

### Loading


- ✓ Pump: 3 Hp / 2200 W
- ✓ Tank: 6000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 11200 W
- Feed water temperature: 10 °C - 60 °C
- Wash temperature: 40 °C - 70 °C
- Rinse temperature: 70 °C - 95 °C
- Wash tank capacity: 60 l
- Boiler capacity: 12 l
- Water consumption/cycle: 5 l
- Drainage base maximum height: 185 mm
- Drain diameter: 30 mm

### External dimensions (WxDxH)


- ✓ Width: 742 mm
- ✓ Depth (closed): 852 mm
- ✓ Depth (open): 1232 mm
- ✓ Height (closed): 1840 mm
- ✓ Height (open): 2035 mm
- Net weight: 163 Kg
- Noise level (1m.): 76 dB(A)

### Crated dimensions

790 x 980 x 1950 mm  
 Gross weight: 177 Kg.

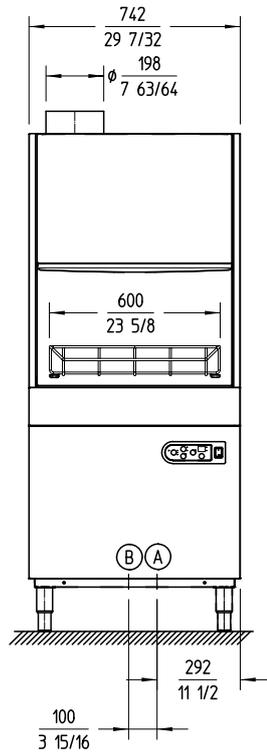

A- Entrada de agua 3/4" GAS  
 B- Tubo de desagüe Ø30 mm

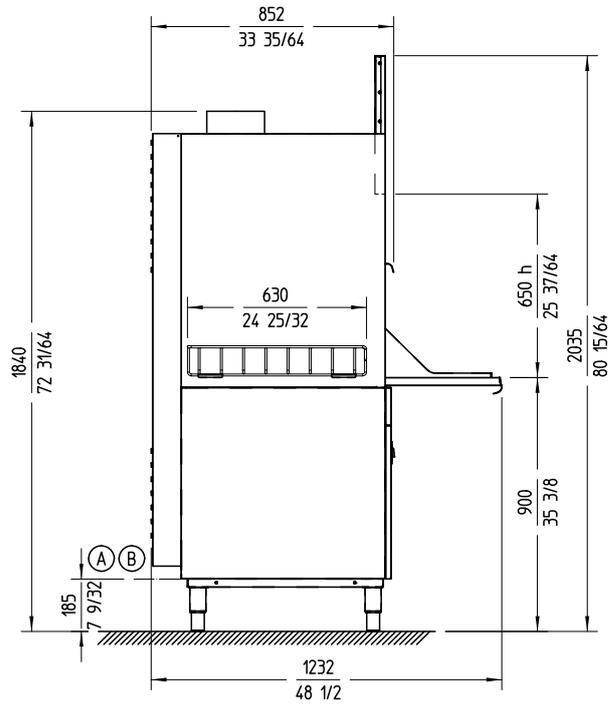

WARE WASHING  
POT WASHERS



**www.sammic.co.uk**  
 Food Service Equipment Manufacturer  
 Unit 2, Trevanah Road  
 Troon Industrial Park  
 LE4 9LS - Leicester  
 uksales@sammic.com  
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet  
updated 27/03/2020