

ENGINED GAS TILTING BRAZIER 120 lt. WITH IRON BOTTOM (Extra EU)

Project:
Rev.:
Zone:
Location:



CODICE
CR0990729

MODELLO
D96/10KBGM

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. It guarantees high performance, exceptional firing uniformity. Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

IRON baking tray (available for non-EU markets) with 2 mm thickness.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

Heating by chrome-plated steel burner.

Safety valve with thermocouple, electric ignition.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ENGINED GAS TILTING BRAZIER 120 lt. WITH IRON BOTTOM (Extra EU)

Project:
Rev:
Zone:
Location:



CODICE
CR0990729

MODELLO
D96/10KBGM

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990729
DEFINITION	D96/10 KBGM BRAZIER GAS M120 FE MOT.
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	206,000 Kg
VOLUME (net)	0,940
PACKAGE LENGTH	1260,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	1,230 m3
GROSS PACKING WEIGHT	220,800 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,120 kW
GAS POWER	24,00
GAS POWER (G25.3/25mbar)	20,00
IP GRADE	IPX5
CERTIFIED MODEL	D96/10 KBGM

ENGINED GAS TILTING BRAZIER 120 lt. WITH IRON BOTTOM (Extra EU)

Project:
 Rev:
 Zone:
 Location:


CODICE
CR0990729

MODELLO
D96/10KBGM

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

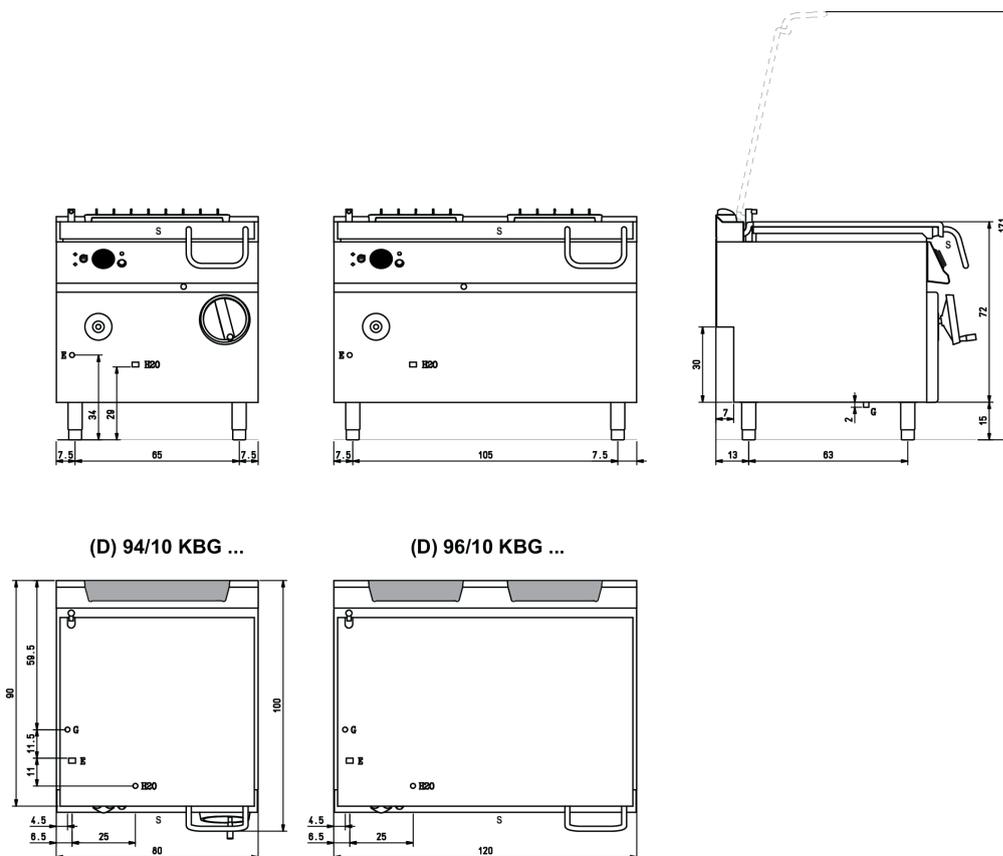

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Scarico vasca - Wannabflussrohr - Pan outlet
 Vidange du bac - Descarga cuba - Water toevoer

4

ENGINEED GAS TILTING BRAZIER 120 lt. WITH IRON BOTTOM (Extra EU)

Project:
Rev:
Zone:
Location:



CODICE
CR0990729

MODELLO
D96/10KBGM

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



ENGINED GAS TILTING BRAZIER 120 lt. WITH IRON BOTTOM (Extra EU)

Project:
Rev:
Zone:
Location:



CODICE
CR0990729

MODELLO
D96/10KBGM

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592809	ZF12	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	