

C62D 2.7kW 13Amp



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



C62D

	Overall dimensions (W x D x H)	mm	575 x 700 x 1225
	Packaging dimensions (W x D x H)	mm	780 x 670 x 1250
↙ ↘	Gross weight	Kg	88
	Net weight	Kg	82
	Cubic volume	m ³	0.65
	Rack size	mm	500 x 600
☐	Door opening	mm	405
	Max useable height	mm	380
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
🔥	Tank volume	L	23
	Tank heating element	kW	2.0
	Surface scrap trays		composite (2mm mesh)
TANK 🌡️	Wash arms		parallel Y (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.7
	Wash temperature	°C	55 - 60 (adjustable)
	Boiler type		open
🔥	Boiler volume	L	6
	Breaktank		yes
	Boiler heating element	kW	2.0
BOILER 🌡️	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Rinse temperature	°C	70 - 85 (adjustable)
	Rinse arms		parallel Y (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water consumption per cycle	L	1.8 - 2.6
🍷	Inlet water pressure	bar	0.5 - 6.0
	Fast program (GLS1)	sec	80
	Total programs	programs	9
	Total power	kW	2.7
⚡	Electric connection	V-Ph-Hz	230-240V 1N 50Hz
	Alternative		not convertible
	Fuse	A	13 (moulded plug)
🔗	Water softener		no



Supplied with

Flat rack	1
Plate rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

C62D 7.7kW 16Amp 3 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



C62D

	Overall dimensions (W x D x H)	mm	575 x 700 x 1225
	Packaging dimensions (W x D x H)	mm	780 x 670 x 1250
↗	Gross weight	Kg	88
	Net weight	Kg	82
	Cubic volume	m ³	0.65
	Rack size	mm	500 x 600
☐	Door opening	mm	405
	Max useable height	mm	380
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
🔥	Tank volume	L	23
	Tank heating element	kW	2.0
	Surface scrap trays		composite (2mm mesh)
🔧	Wash arms		parallel Y (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.7
	Wash temperature	°C	55 - 60 (adjustable)
	Boiler type		open
🔧	Boiler volume	L	6
	Breaktank		yes
	Boiler heating element	kW	5.0
🔧	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Rinse temperature	°C	70 - 85 (adjustable)
	Rinse arms		parallel Y (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water consumption per cycle	L	1.8 - 2.6
🍷	Inlet water pressure	bar	0.5 - 6.0
	Fast program (GLS1)	sec	80
	Total programs	programs	9
⚡	Total power	kW	7.7
	Electric connection	V-Ph-Hz	400V 3+N 50Hz
	Fuse	A	16
🔌	Water softener		no



Supplied with

Flat rack	1
Plate rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

C62D 6.7kW 30Amp



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



C62D

↗ ↘	Overall dimensions (W x D x H)	mm	575 x 700 x 1225
	Packaging dimensions (W x D x H)	mm	780 x 670 x 1250
	Gross weight	Kg	88
	Net weight	Kg	82
☒	Cubic volume	m ³	0.65
	Rack size	mm	500 x 600
	Door opening	mm	405
	Max useable height	mm	380
	Rack guide rails		embossed
🔥	Body construction		stratified double skin
	Tank construction		welded - stamped base
	Tank volume	L	23
	Tank heating element	kW	2.0
	Surface scrap trays		composite (2mm mesh)
	Wash arms		parallel Y (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.7
	Wash temperature	°C	55 - 60 (adjustable)
	Boiler type		open
🔥	Boiler volume	L	6
	Breaktank		yes
	Boiler heating element	kW	6.0
🔥	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Rinse temperature	°C	70 - 85 (adjustable)
	Rinse arms		parallel Y (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
🍷	Water consumption per cycle	L	1.8 - 2.6
	Inlet water pressure	bar	0.5 - 6.0
	Fast program (GLS1)	sec	80
⚡	Total programs	programs	9
	Total power	kW	6.7
	Electric connection	V-Ph-Hz	230-240V 1N 50Hz
	Alternative		230-240V 1N 2.7kW 13A*
🔌	Alternative		230-240V 1N 4.7kW 20A
	Fuse	A	30
🚰	Water softener		no



Supplied with



Flat rack	1
Plate rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

*Moulded plug

C62D



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

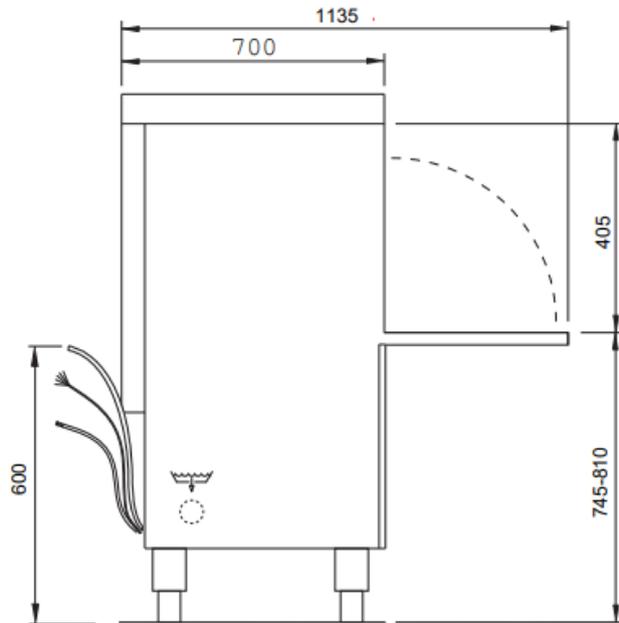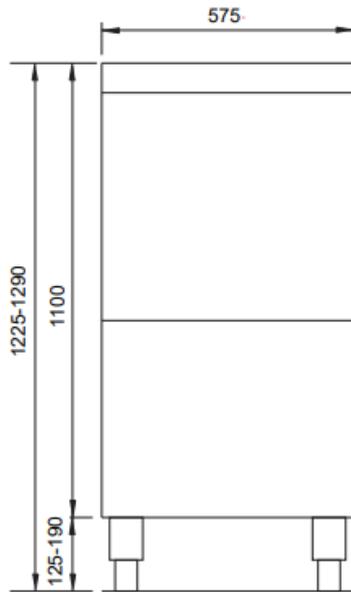

All services must be within 1 metre

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 1.2