VSR60A-16

Sandwich Top 60” Prep Refrigerator

VALIANCE by HOSHIZAKI

VSR60A-16
11/04/26
Item #13765

W x D x H
59.75 x 30.13” x 42.56”
(including 6” casters)

Item #: _____

Project: _____

Qty: _____

AIA#: _____



NSF / ANSI 7
2M75

c UL us LISTED
2M75

NATURAL REFRIGERANT

FACTORY WARRANTY
Labor 3 Yr Entire Machine
Parts 4 Yr
Parts 5 Yr Compressor

kcl AQ

Dimensions / Capacity	Two Section VSR60A-16
Interior Storage Capacity (CF) (AHAM)	12.09 ft³
Overall Width x Depth	59.75” x 30.13”
Height (including 6” casters)	42.56”
Door Opening (W x H)	22.75” x 25.56”
Depth with Door Open at 90°	57.47”
Adjustable Shelves	2
Shelf Dimensions (W x D)	27.25” x 15.93”
Crated Shipping Weight	370 lbs.
Crated Length x Depth x Height	64.13” x 34.5” x 45.5”

Electrical / Refrigeration	Two Section VSR60A-16
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P
Voltage Range	104-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	32.5° to 36.5°F
Amperage	2.9
Energy Consumption (kWh/day) @ASHRAE	4.04
Appox. Nominal Compres. BTU/HR (HP)	1,853
Refrigerant / Charge Amount (oz.)	R290 / (2.12oz)

FEATURES

- Engineered to maintain NSF-7 temperatures at 86°F ambient
- Environmentally friendly R290 hydrocarbon refrigerant
- Prep-guard helps to prevent mess from dropping into the cabinet
- Spring assisted self-closing doors with stay open feature
- Stainless steel exterior door(s), sides and top
- Stainless steel interior floor with aluminum sides, rear, and top
- Provided with full complement of polycarbonate plastic 1/6th size pans, 4” deep
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2” increments; 105 lbs. capacity
- Standard with 6” casters (two with brakes)
- 9 ft. cord and plug

Options

- ☐ 6” Casters (set of 4) (HS-5036)
- ☐ 2.25” Casters (set of 4) (HS-5037)
- ☐ Single overshelf for 60” (HS-5174)
- ☐ Double overshelf for 60” (HS-5165)

Warranty

3 Year - Labor on entire machine.
4 Year - Parts on entire machine.
5 Year - Parts on Compressor
Valid in United States, Canada, Puerto Rico and U.S. Territories.
Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.


VSR60A-16

Sandwich Top 60” Prep Refrigerator


VALIANCE by HOSHIZAKI

VSR60A-16
11/04/26
Item #13765


FRONT VIEW

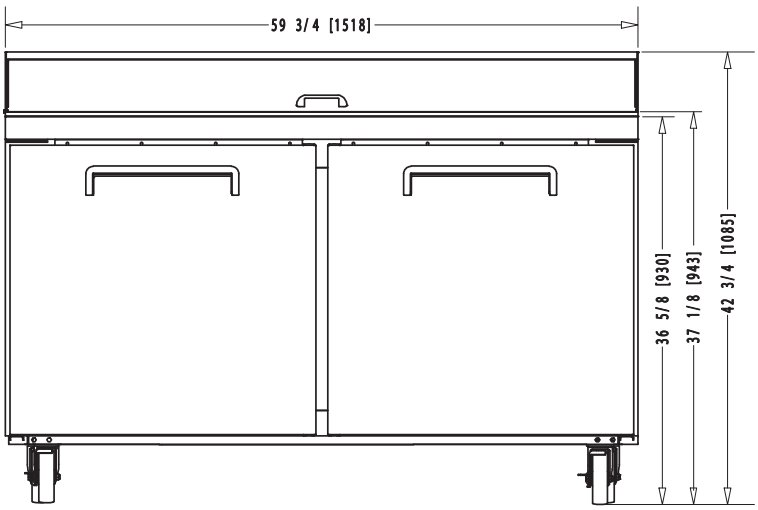

SIDE VIEW

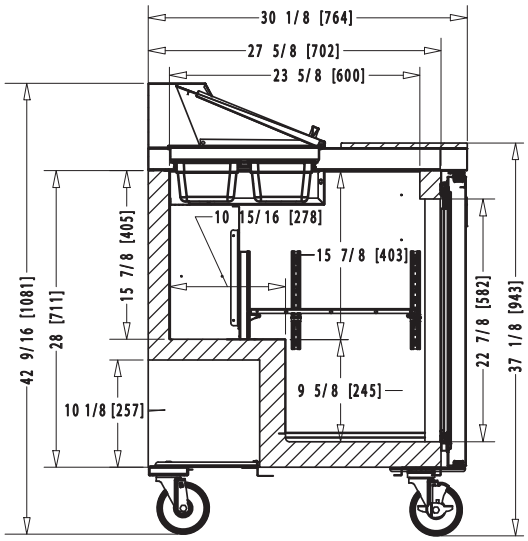

PLAN VIEW

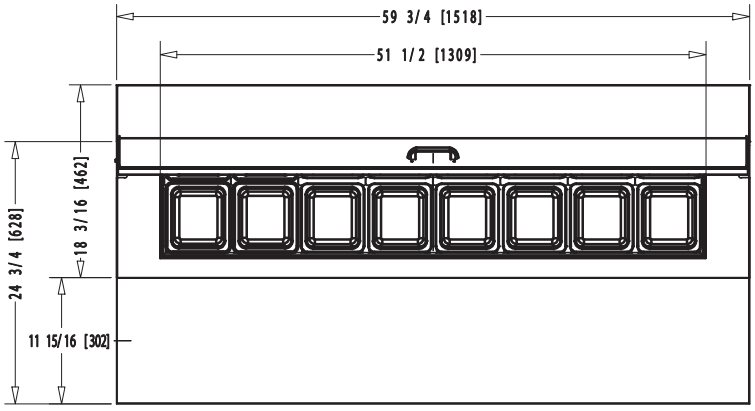

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com